


Pedestals


Pedestals elevate pavers above roof surfaces to match the height of surrounding roof gardens or interior floors. They also create space below for uninterrupted water drainage and to run pipes carrying water or power. With most pedestals this is a labor-intensive process requiring the installer to set slope-compensation discs and carefully adjust the height of each pedestal before placing pavers. Corrections require removing a section of pavers, adjusting the pedestal heights, and replacing the pavers.

These pedestals significantly speed installation by eliminating the need to adjust for slopes or to accurately pre-adjust heights. The pedestals are roughly set, the pavers are placed, and the heights are then accurately adjusted with a special tool that fits through the gaps in the pavers. Each pedestal head tilts to automatically compensate for slopes up to 5°. By selecting the appropriate base, top, and extensions, the system can accommodate any height from 1-1/8" and 21-3/4".

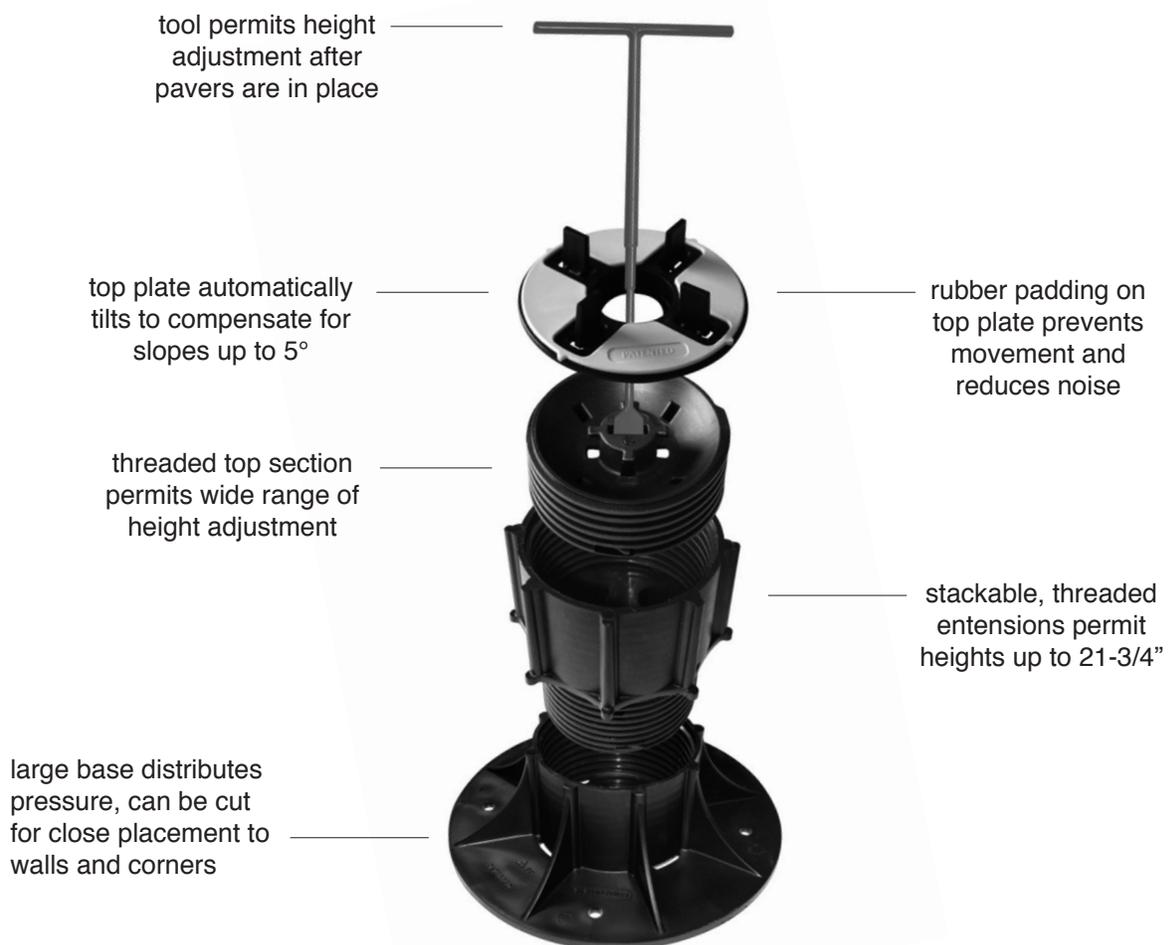

COMPONENTS

Pedestals are normally supplied as kits consisting of a flanged base, a threaded top, and one or more extensions if required. The required height is determined by subtracting the paver thickness from the overall height measured from the roof surface to the top of the pavers. Kits 0, 1, and 2 cover heights from 1-1/8" to 3" and consist of bases B0, B1, and B2 with corresponding tops T0, T1, and T2. Kits 3, 4, and 5 cover heights from 3" to 8-1/2" and consist of base T3 with tops T3, T4, and T5. Kits 6 through 14 cover heights up to 21-3/4" and consist of base T3 with tops T3, T4, and T5 with one, two, or three threaded extensions installed between the base and top.

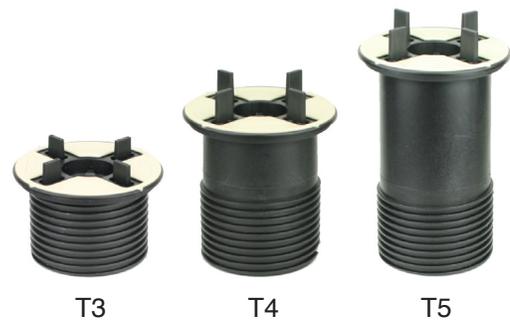

T3

T4

T5



T0



T1



T2



extension

adjusting
tool

B0



B1



B2



B3

Kit ID	Minimum	Maximum	Base ID	Top ID	Extensions
0	1-1/8"	1-1/2"	B0	T0	0
1	1-1/2"	2"	B1	T1	0
2	2"	3"	B2	T2	0
3	3"	4-3/4"	B3	T3	0
4	4-3/4"	6-3/4"	B3	T4	0
5	6-3/4"	8-1/2"	B3	T5	0
6	5-1/2"	9"	B3	T3	1
7	7-1/4"	10-3/4"	B3	T4	1
8	9-1/4"	12-3/4"	B3	T5	1
9	8"	13-1/2"	B3	T3	2
10	9-3/4"	15"	B3	T4	2
11	11-3/4"	15-3/4"	B3	T5	2
12	10-1/2"	18"	B3	T3	3
13	12-1/4"	19-3/4"	B3	T4	3
14	14-1/4"	21-3/4"	B3	T5	3